


PD8ULCB

UL Listed Power Distribution Module

Altronix PD8ULCB UL Listed Sub-Assembly power distribution module is designed to convert a single AC or DC input into eight (8) PTC protected Class 2 Rated power-limited outputs.

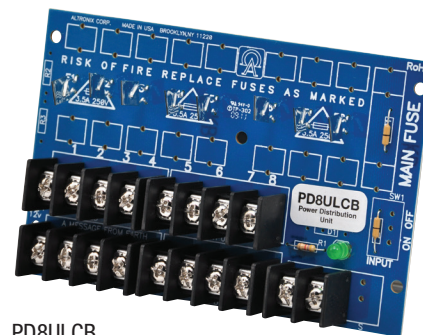

PD8ULCB

Specifications

Input

Voltage Range 12VDC or 24VDC, up to 10A or
24VAC or 28VAC, up to 12A

Outputs

Eight (8) PTC protected Class 2 Rated power-limited outputs
(auto-resettable)
2A per output max.
Total output current should not exceed max current rating of
power supply employed
PTCs are rated @ 2A/250V

Indicators (LED)

DC Output Power LED

Agency Listings

UL:

UL294 Access Control
UL603 Burglar Alarm
UL1481 Fire Alarm

cUL:

General Signaling Equipment Evaluated to
CSA Standard C22.2 No.205-M1983
Power Supplies for Burglar Alarm Systems ULC-5318-96

Physical and Environmental

Dimensions (L x W x H)

5.25" x 3.25" x 1" (133.4mm x 82.6mm x 25.4mm)

Product Weight 0.25 lb. (0.11 kg)

Shipping Weight 0.3 lb. (0.14 kg)

Temperature

Operating 0°C to 49°C (32°F to 120°F)

Storage -20°C to 70°C (-4°F to 158°F)


Relative Humidity 85% +/-5%

Mounting hardware included.

Lifetime Warranty

Board Dimensions (L x W x H) and Drawing

5.25" x 3.25" x 1" (133.4mm x 82.6mm x 25.4mm)

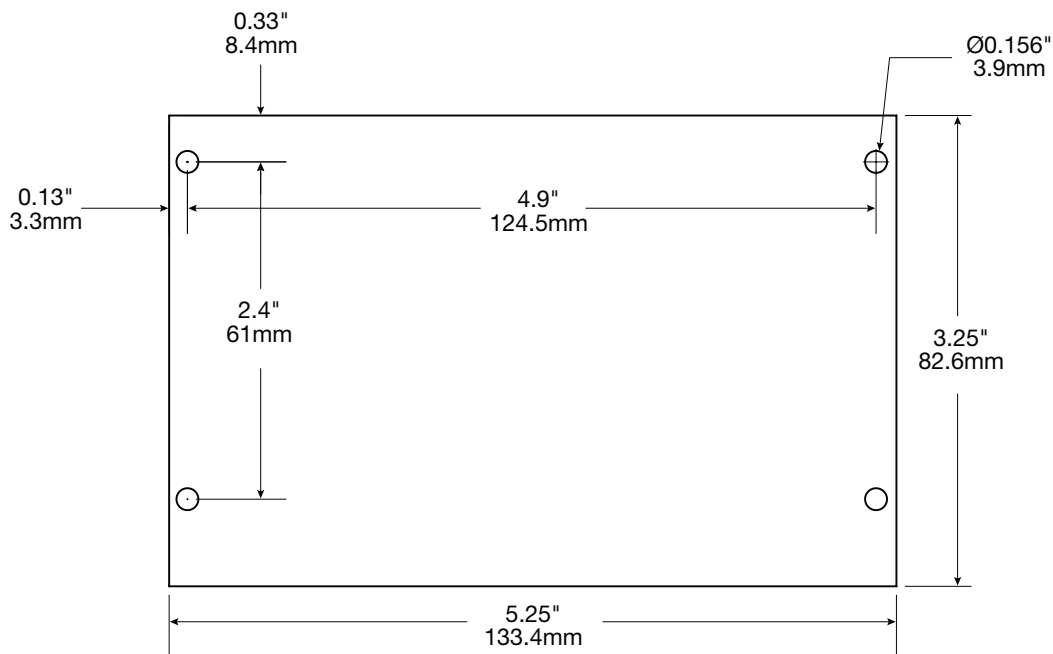

Lifetime Warranty