

## Trove2DR2 (Enclosure & Backplane) / TDR2 (Backplane)

Access and Power Integration Solutions



Altronix Trove2DR2 is designed to easily combine Altronix power and sub-assemblies with DIN Rail mountable products such as access controllers, building automation modules, network switches, utility boxes, terminal blocks and more. The removable backplane accommodates various lengths of DIN Rail to mount in vertically or horizontally, for any security or industrial application.



Trove2DR2

\* Boards not included

### Trove2DR2 (Trove2 Enclosure + TDR2 Backplane) Features

- Accommodates DIN Rail access controllers with or without Altronix power/accessories:
  - D10, D12, D19, D24
- Includes Altronix Trove2 Enclosure and one (1) removable TDR2 backplane

#### Agency Listings

##### UL:

UL294 - Access Control System.

##### cUL:

CAN/ULC - s319-05 - Electronic Access Control Systems.

##### CE

European Conformity.

#### Features

- Simplifies board layout and wire management
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit).
  - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit).

#### Features (cont'd)

- Accommodates up to four (4) 12VDC/7AH batteries
- 16 AWG powder coated steel
- Includes cam lock, tamper switch and mounting hardware

#### Trove2DR2 - Dimensions (H x W x D):

27.25" x 21.5" x 6.5" (692.15mm x 546.1mm x 165.1mm)

#### Trove2DR2 - Weights:

Product - 37.1 lb. (16.83 kg)  
Shipping - 40.85 lb. (18.53 kg)

#### TDR2 - Dimensions (H x W x D):


25.375"H x 19.375"W x 0.3125"D  
(644.5mm x 492.1mm x 8mm)

#### TDR2 - Weights:

Product - 8.0 lb. (3.63 kg)  
Shipping - 10.0 lb. (4.53 kg)

**Access Controller Position Chart for the Following Models:**

Altronix	Pem Mounting
AL400ULXB2, AL400ULXB2V, AL600ULXB, AL600XB220, AL1012ULXB, AL1012XB220, AL1024ULXB2, AL1024XB2V, eFlow4NB, eFlow4NBV, eFlow6NB, eFlow6NBV, eFlow102NB, eFlow102NBV, eFlow104NB, eFlow104NBV, Tango1B	Ⓐ
ACM4, ACM4CB, LINQ8PD, LINQ8PDCB, MOM5, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB, VR6	Ⓑ

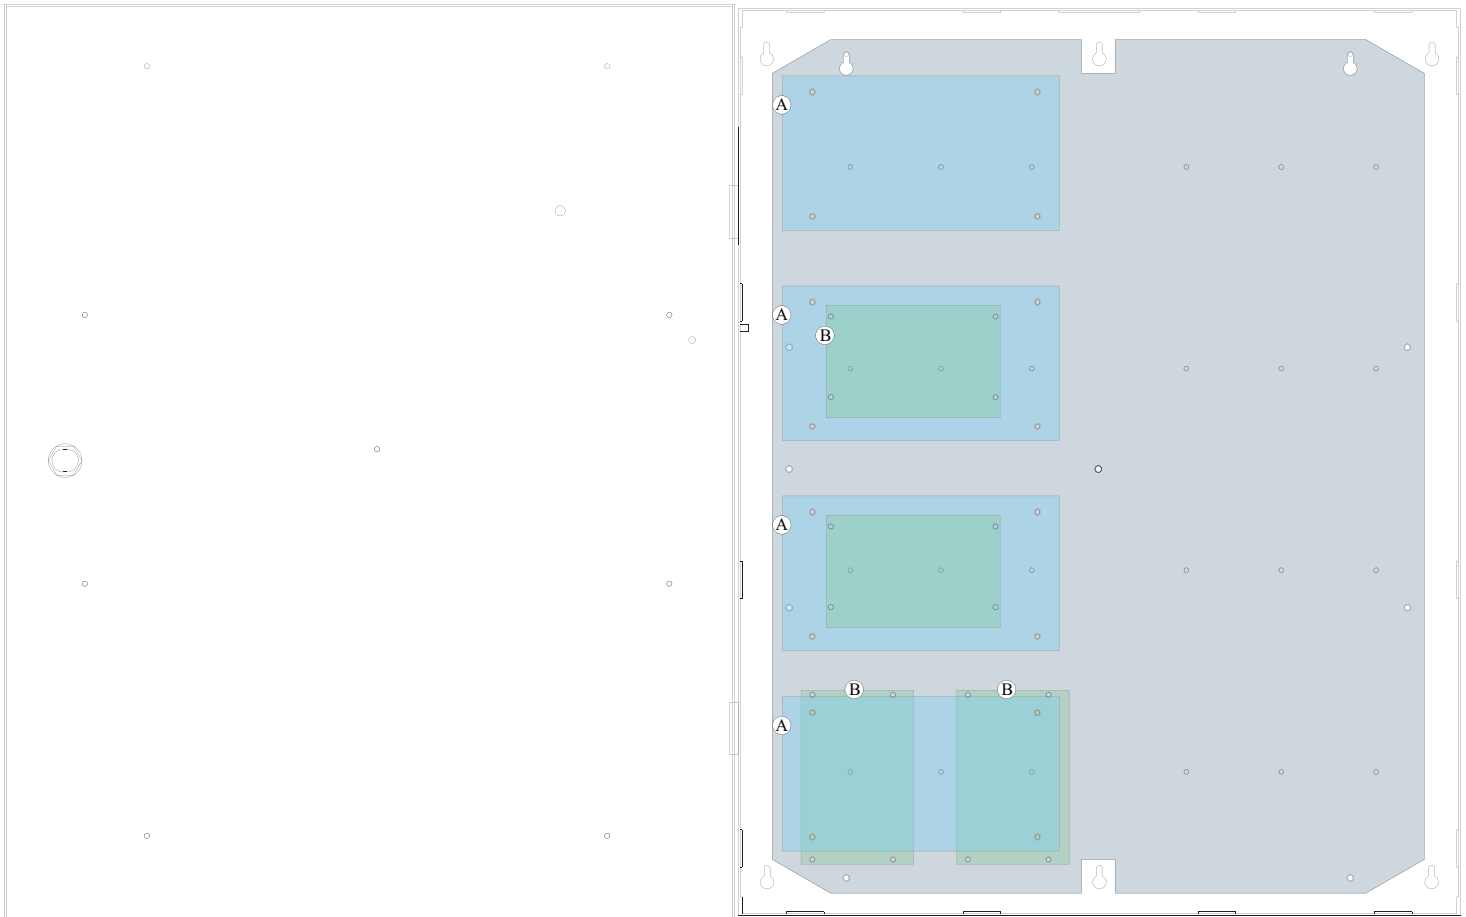

**Access Controller Position Chart for the Following Models:**

DIN Rail	Pem Mounting
D10, D12, D19	(C)
D24	(D)

